

V... ZZ / 2RS

◆ Material:

Chrome Steel-52100

Stainless Steel - 440C


◆ Shields and Seals (suffix):

ZZ (or KDD) - double shields

2RS (or NPP) - double seals

◆ Tolerance Class:

ABEC-1,ABEC-3,ABEC-5

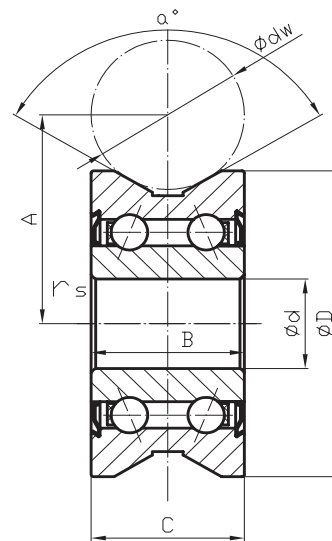

C&H	Dimensions(mm)								Load Ratings(N)		Limiting Speed(r/min)		Weight ≈(Kg)
	dw	d	D	B	C	A	α	rs	Cr	Cor	ZZ	2RS	
LV20/7	10	7	22	11	11	14.5	120	0.3	3780	2050	20000		0,017
LV20/8	10	8	30	14	14	18.1	120	0.3	5130	2670	19000		0,049
LV201	20	12	41	20	20	28	120	0.3	8470	5370	14000		0,130
LV201-14	14	12	39.9	20.1	18	24	100	0.5	8900	5000	14000		0,107
LV202-38	10	15	38	17	17	22.3	120	0.5	8470	5370	14000		0,087
LV202-40	10	15	40	18	18	22	120	0.5	8470	5370	14000		0,110
LV202-41	20	15	41	20	20	28	120	0.5	8470	5370	14000		0,116
LV203	20	17	58	25	25	35	120	0.5	14660	9100	12000		0,325
LV204-57	30	20	57	22	22	41	120	0.6	14660	9100	12000		0,290
LV204-58	30	20	58	25	25	41	120	0.6	14600	9100	12000		0,310

* Available to make from 440C stainless steel.